

## MODEL 1201 ACCELEROMETER


### SPECIFICATIONS

- DC Response Accelerometer
- Durable, Low Noise Cable
- Vehicle Crush Zone Testing
- Low Cost, High Performance

The **Model 1201 Accelerometer** is a small, compact uniaxial device designed for vehicle impact and road testing. Its mechanical overload stops provide high shock protection in rugged applications. Featuring ranges from  $\pm 50$  g to  $\pm 1000$ g and frequency response to 3000 Hz, this sensor is easily mounted in hard to get places on vehicles under test.

For a similar accelerometer designed for bolt mounting, see the model 1201F.

### DIMENSIONS

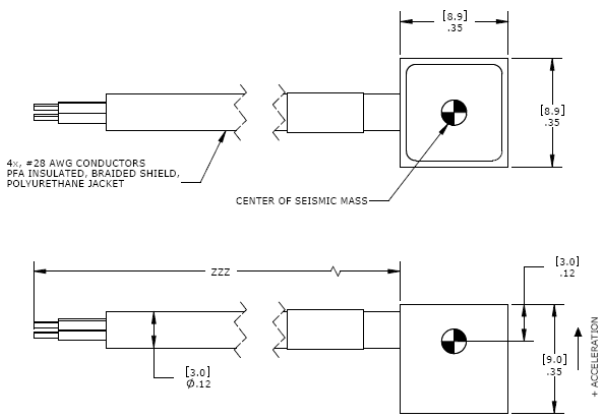


### FEATURES

- Advanced MEMS Sensing Element
- $\pm 50$ g to  $\pm 1000$  g Dynamic Range
- 2-10 Vdc Excitation
- 0-50 °C Temperature Range
- $\pm 40$  mV Zero Measurand Output
- Gas Damping
- Connector Options
- Mechanical Overload Stops

### APPLICATIONS

- Crash Testing
- Crush Zone Testing
- Impact Testing
- Off-Road Testing
- Transportation Testing

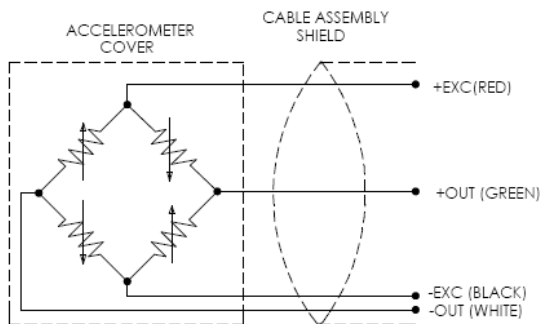

**PERFORMANCE SPECIFICATIONS**

All values are typical at ±24°C, 80 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters	-0050	-0100	-0200	-0500	-1000	Notes
<b>DYNAMIC</b>						
Range(g)	±50	±100	±200	±500	±1000	
Sensitivity (mV/g) <sup>1</sup>	2.0	0.9	0.9	0.40	0.15	@ 10Vdc excitation ±5%
Frequency Response (Hz)	0-800	0-1000	0-1400	0-2000	0-3000	
Natural Frequency (Hz)	2000	3000	4000	6000	7000	
Non-Linearity (% FS)	±1	±1	±1	±1	±1	
Damping Ratio	0.7	0.5	0.5	0.3	0.1	Typical
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	
Shock Limit (g)	3000	3000	4000	5000	5000	
<b>ELECTRICAL</b>						
Zero Acceleration Output (mV)	<±40					
Excitation (Vdc)	2 to 10					
Input Resistance (Ω)	2400-6000					
Output Resistance (Ω)	2400-6000					
Insulation Resistance (MΩ)	>100					@50Vdc
Ground Isolation	Isolated from mounting surface.					
<b>ENVIRONMENTAL</b>						
Thermal Zero Shift (%FSO/°C)	±0.05					From 0 to +50°C
Thermal Sensitivity Shift (%/°C)	±0.2					From 0 to +50°C
Operating Temperature (°C)	-20 to +85					
Humidity	Epoxy Sealed, IP65					
<b>PHYSICAL</b>						
Case Material	Anodized Aluminum					
Cable	4x #28 AWG Conductors, PFA Insulated, Braided Shield, PU Jacket					Cable Not Included
Weight (grams)	<2.5					
Mounting	Adhesive					

<sup>1</sup> Output is ratiometric to excitation voltage

**Calibration supplied:** CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Limit

**Optional accessories:** 121 Three Channel DC Differential Amplifier  
140A Auto-zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

**ORDERING INFORMATION**

**PART NUMBERING**    Model Number+Range+Cable Length+Options

1201-GGGG-ZZZ-XXX

|    |    |    Options (otherwise leave blank)  
|    |    Cable (360 is 360 inches)  
|    Range (0100 is 100 g)

Installed

**Optional Dash Numbers**

-001    5Vdc Calibration  
-002    2Vdc Calibration  
-005    Lemo FGG.1B.307 and Dallas DS2401

Example: 1201-1000-360

Standard Configuration: 1000g, 360" (30ft) cable, No Options

**NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
Sales and Customer Service  
Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
t&m@meas-spec.com

**Stig Wahlström**  
Automatik   
Box 64, 123 22 FARSTA, Sweden  
Phone:+46(0)8 683 33 00 Fax:+46[0]8 605 81 746  
Visit us at [www.wahlstrom.se](http://www.wahlstrom.se)

**ASIA**

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Sales and Customer Service  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
t&m@meas-spec.com

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.